




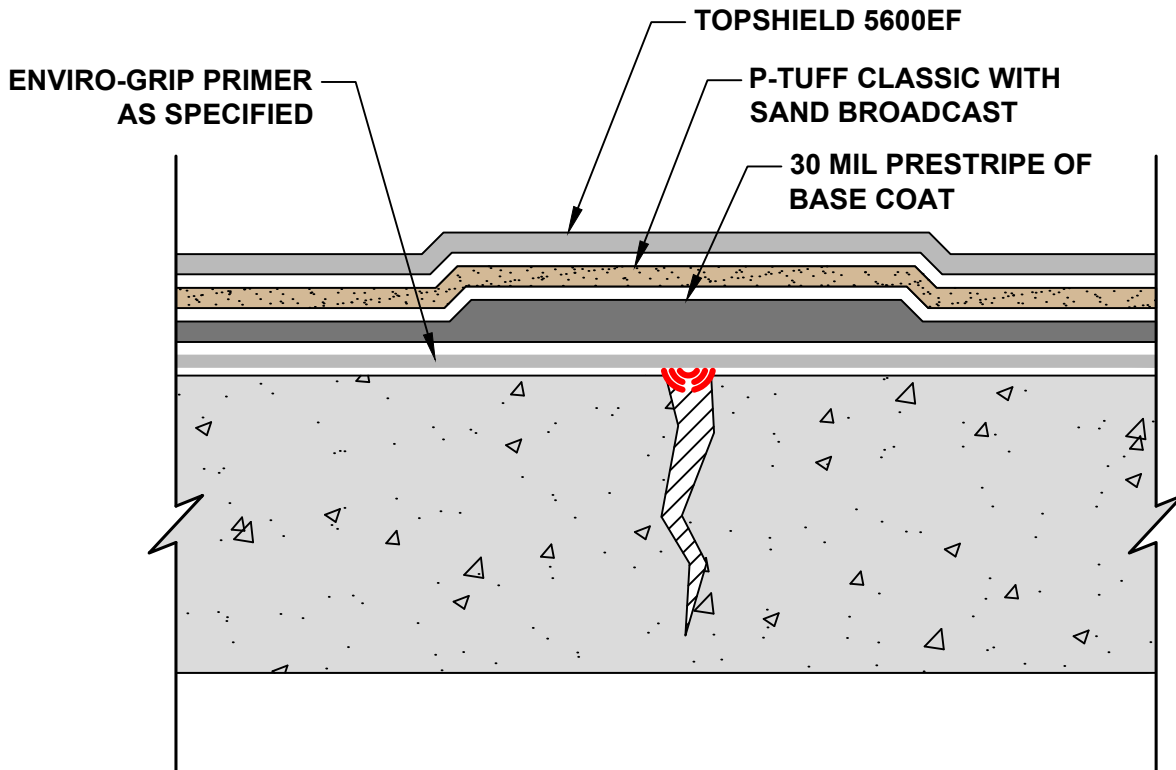


NOTES:

-  - ENVIRO-GRIP PRIMER AS SPECIFIED
-  - P-TUFF CLASSIC AT 30 MILS
-  - 16-30 MESH OR 12-20 SILICA SAND
-  - TOPSHIELD 5600EF AT 60 SQFT/GAL
-  - PTS E-101 SEALANT



FLEXIDECK P-PD AT CRACKS AT $\frac{1}{16}$ " OR LESS



8550 West Desert Inn Road
 Suite 102-451
 Las Vegas, NV 89117
 P | 1-866-977-8833
 F | 1-800-804-0182
 www.polytuffus.com
 sales@polytuffus.com

DETAIL NAME & DESCRIPTION:
CRACKS AT $\frac{1}{16}$ " WIDE OR LESS

DESIGNED B. CLANTON	SHEET 1 OF 1
DRAWN M. HELMANDOTTAR	SCALE N.T.S
DATE 6/2/17	DETAIL NO. T-22