




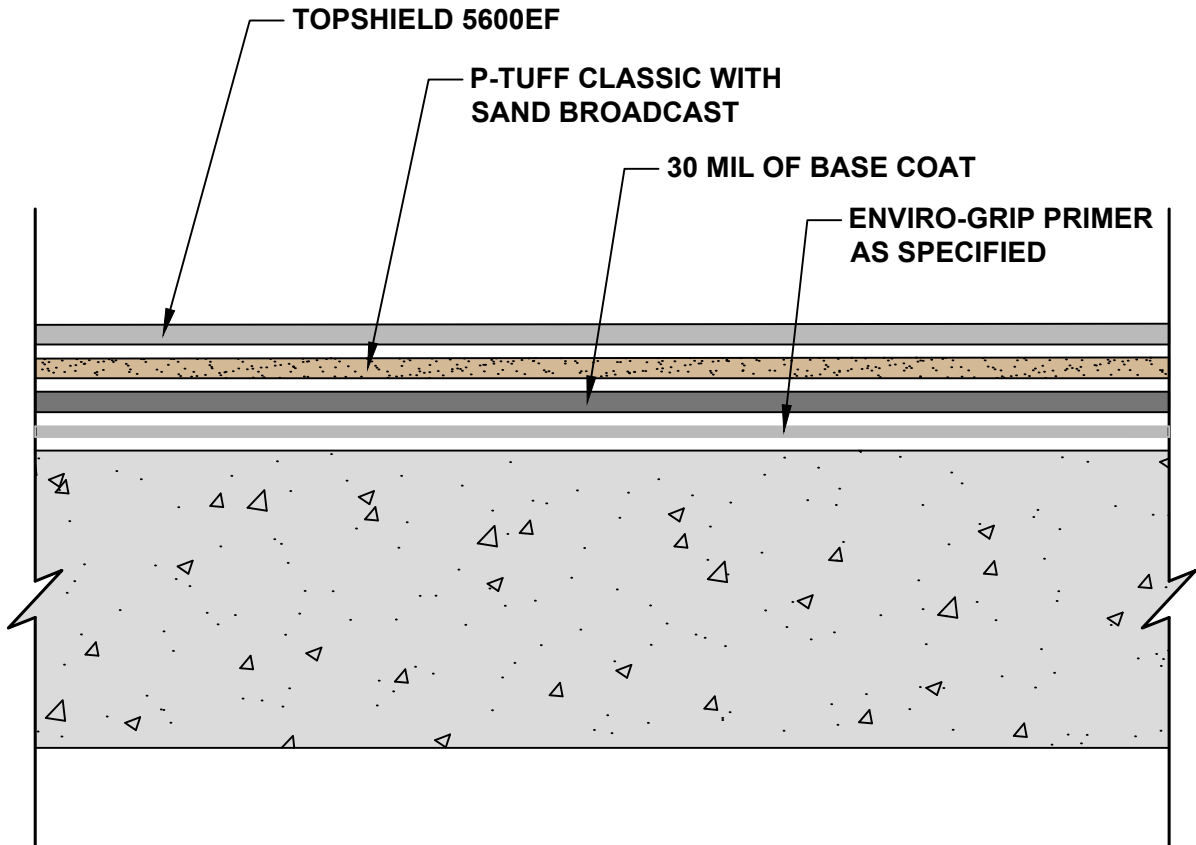


NOTES:

-  - ENVIRO-GRIP PRIMER AS SPECIFIED
-  - P-TUFF CLASSIC AT 30 MILS
-  - 16-30 MESH OR 12-20 SILICA SAND
-  - TOPSHIELD 5600EF AT 60 SQFT/GAL
-  - PTS E-101 SEALANT



8550 West Desert Inn Road
 Suite 102-451
 Las Vegas, NV 89117
 P | 1-866-977-8833
 F | 1-800-804-0182
 www.polytuffus.com
 sales@polytuffus.com

DETAIL NAME & DESCRIPTION:
**FLEXIDECK P-PD WITH
 COVERAGE RATES**

| | |
|---------------------------------|---------------------------|
| DESIGNED B. CLANTON | SHEET 1 OF 1 |
| DRAWN M. HELMANDOTTAR | SCALE N.T.S |
| DATE 6/7/17 | DETAIL NO. T-25 |