

# POLY-TUFF SYSTEMS INTERNATIONAL

2250 E. Tropicana Ave  
Suite 19-600  
Las Vegas, NV 89119




Phone: (866) 977-8833  
Fax: (800) 804-0182  
Email: sales@polytuffus.com  
Web: www.polytuffus.com

## PSI Tech-Note

07/12/2008

### Super Seal Tape Crack Treatment with Flexideck Systems

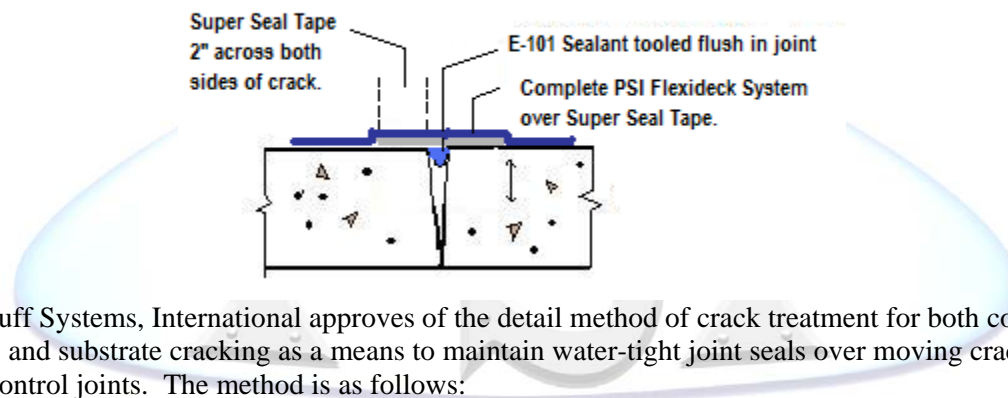

Polytuff Systems, International approves of the detail method of crack treatment for both control joints and substrate cracking as a means to maintain water-tight joint seals over moving cracks and control joints. The method is as follows:

1. Clean Joint.
2. Apply PTS E-101 Joint Sealant over crack tooling the sealant flush with the surface.
3. Apply Enviro-grip primer over textured surface, if necessary. Primer must be puddle free and thumbprint tacky before applying tape over the joint.
4. Apply Super Seal Tape over crack, extending two inches both sides from center of crack or joint. Apply firm hand pressure over all the tape pressing the tape against the substrate leaving no fish-mouths at tape edge. Super Seal Tape should have no voids and relatively wrinkle free.
5. Apply Flexideck Deck Coating System over Super Seal Tape. **CAUTION: Do not prime over the Super Seal Tape.** Allow Deck Coating System to be applied directly over the tape.

The product data sheets in the product data sheet section of the Poly-Tuff Binder or at [www.polytuffus.com](http://www.polytuffus.com). Feel free to consult the related data sheet or call 866.977.8833 for further information.

*Bob Clanton*

Bob Clanton  
National Sales Manager  
702.343.7067