

# POLY-TUFF SYSTEMS INTERNATIONAL

2250 E. Tropicana Ave  
Suite 19-600  
Las Vegas, NV 89119




Phone: (866) 977-8833  
Fax: (800) 804-0182  
Email: sales@polytuffus.com  
Web: www.polytuffus.com

## PSI Tech-Note

10//2009

### Super Seal Tape and Coating Joint Repair

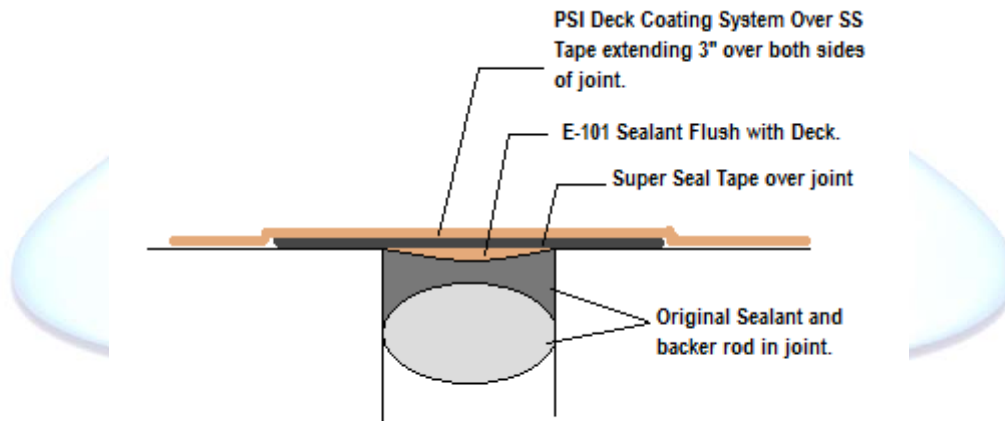

The above detail offers Super Seal Tape and PSI Deck Coating as an easy and economical method of repairing expansion joints that will be coated. The concave existing sealant is used as a base for the new system. The installed expansion joint is flushed out with E-101 to prevent any uneven wear spots. Super Seal Tape is placed over the joint and 3" beyond the joint on both sides of the joint. The Super Seal Tape should be firmly pressed into place on a clean substrate. The PSI deck coating system is then installed over the Super Seal Tape extending a minimum of 3" beyond the sides of the tape on both sides of the tape.

The product data sheets in the product data sheet section of the Poly-Tuff Binder or at [www.polytuffus.com](http://www.polytuffus.com). Feel free to consult the related data sheet or call 866.977.8833 for further information.

*Bob Clanton*

Bob Clanton  
National Sales Manager  
702.343.7067